




Nero Swing Check Valves

Nero Swing Check Valve; PN 10 and PN 16

Application: Suitable for water installation

Design and Standard: Acc to EN 1074-3
 Face to Face: Acc to EN 558-1 Series 48
 Flanges: Acc to EN 1092-2
 Testing: Acc to EN 12266
 Working: Temp.: maximal 80°C

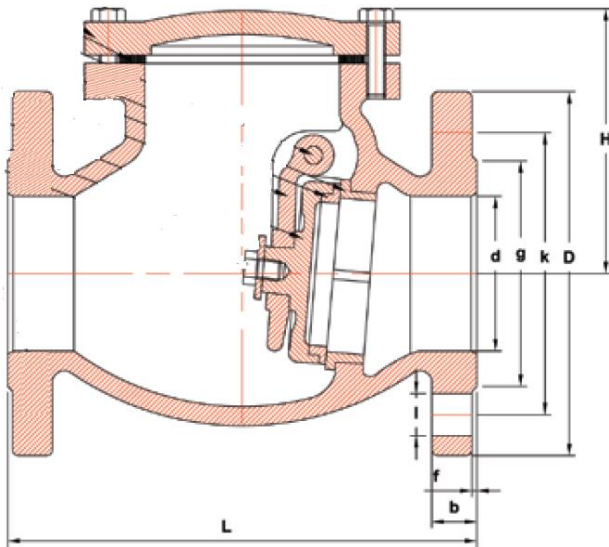

Part Name	Material
Bolt	DIN 933
Bonnet	Cast Iron (EN-JL 1040)
Gasket	Graphite
Hanger Pin	Stainless Steel (17440X20Cr13)
Seat	Brass (MS58)
Disc Gasket	Brass (MS58)
Hanger	Ductile Iron (EN-JS 1050)
Disc	Cast Iron (EN-JL-1040)
Washer	DIN 127
Bolt	DIN 933
Body	Cast Iron (EN-JL-1040)

DN	G		K		D		L	H	b		n-ød		W (kg)
	PN10	PN16	PN10	PN16	PN10	PN16			PN10	PN16	PN10	PN16	
40	88	88	110	110	150	150	180	120	18	18	4-18	4-18	11.5
50	102	102	125	125	165	165	200	140	20	20	4-18	4-18	13.6
65	122	122	145	145	185	185	240	150	20	20	4-18	4-18	21
80	138	138	160	160	200	200	260	165	22	22	4-18	8-18	26.5
100	158	158	180	180	220	220	300	175	24	24	8-18	8-18	32
125	188	188	210	210	250	250	350	198	26	26	8-18	8-18	45
150	212	212	240	240	285	285	400	229	26	26	8-18	8-18	71.5
200	268	268	295	295	340	340	500	249	26	30	8-23	12-23	95
250	320	320	350	355	395	405	600	310	28	32	12-23	12-27	139
300	370	378	400	410	445	460	700	322	28	32	12-23	12-27	188

Subject to alternation

We reserve the right to make any technical modification. We are not responsible for any error in printing.





NeroValves GmbH


Industrial Valves: DIN - API - ASME

Nero Swing Check Valves

Nero Swing Check Valve; PN 10 and PN 16

Application: Suitable for water installation

Design and Standard: Acc to EN 1074-3
 Face to Face: Acc to EN 558-1 Series 48
 Flanges: Acc to EN 1092-2
 Testing: Acc to EN 12266
 Working: Temp.: maximal 80°C

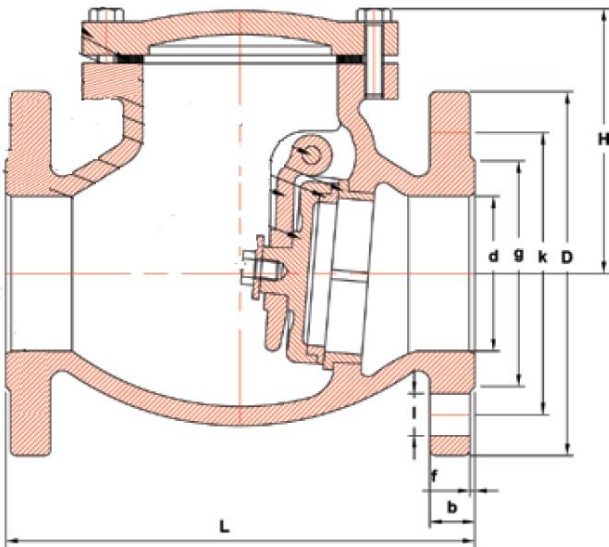

Part Name	Material
Bolt	DIN 933
Bonnet	Cast Iron (EN-JL 1040)
Gasket	Graphite
Hanger Pin	Stainless Steel (17440X20Cr13)
Seat	Brass (MS58)
Disc Gasket	Brass (MS58)
Hanger	Ductile Iron (EN-JS 1050)
Disc	Cast Iron (EN-JL-1040)
Washer	DIN 127
Bolt	DIN 933
Body	Cast Iron (EN-JL-1040)

DN	G		K		D		L	H	b		n-ød		W (kg)	
	PN10	PN16	PN10	PN16	PN10	PN16			PN10	PN16	PN10	PN16	PN10	PN16
350	429	429	460	470	505	520	800	430	24.5	26.5	16-23	16-28	434	482
400	480	480	515	525	565	580	900	480	24.5	28	16-28	16-31	495	550
450	530	548	565	585	640	640	1000	512	30	30	20-28	20-31	668	742
500	582	609	620	650	670	715	1100	525	26.5	31.5	20-28	20-34	718	798
600	682	720	725	770	780	840	1300	608	30	36	20-31	20-37	1200	1330

Subject to alternation

We reserve the right to make any technical modification. We are not responsible for any error in printing.

Nero Valves GmbH

Mörfelden – Walldorf / Germany

www.nero-valves.com; www.nero-valvesgmbh.de; info@nero-valvesgmbh.de



Member of
German Water
Partnership

Solutions you can trust.